



Architrave Jamb Framing Out sizes for interior doors

Height is allowing for std 25mm gap under door



Architrave jambs 112mm wide 20mm thick, ex 125mm by 40mm

All sizes are framers trim/rough opening sizes

All sizes are the door height/width plus

Example frame out size: single hung door height is 1980mm plus 60mm = 2040mm

Example frame out size: single hung door width is 810mm plus 60mm = 870mm

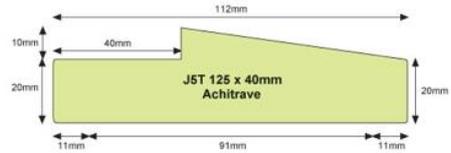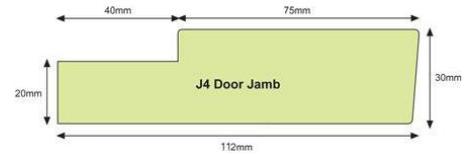

	Height	Width
Single hung door	door plus 60mm	door plus 60mm
Pair/double hung door	door plus 60mm	door x2 plus 60mm
Cavity slider	door plus 100mm	door X2 plus 30mm
Pair/double cavity slider	door plus 100mm	door X4 plus 20mm
Robemaker pair of sliders	door plus 70mm	door X2 plus 30mm
Robemaker three door slider	door plus 70mm	door X3
4 door bifold Cowdroy gear	door plus 100mm	door X4 plus 75mm
2 door bifold Cowdroy gear	door plus 100mm	door X2 plus 75mm
Lift door (minimum 860 wide door)	door plus 60mm	door plus 100mm

Standard door widths are 410,460,510,560,610,660,710,760,810 mm wide

Standard over widths are 860,910 mm wide

Over width doors with steel inserts are 960,1000,1050,1100,1150,1200 mm wide

Standard door height is 1980mm high, next size up is 2200mm high and then next size up is 2400mm high.