

## Gib Groove Jamb Framing Out Sizes for interior doors

Height is allowing for standard 25mm gap under door

### Gib Grooved, J6, thick jambs ex 150 by 50


All sizes are framers trim opening /rough opening sizes

All sizes are the door height/width plus

**Example frame out size:** single hung door height is 1980mm plus 70mm = 2050mm

**Example frame out size:** single hung door width is 810mm plus 80mm = 890mm

**Example frame out size** of a cavity slider height is 1980mm plus 100mm = 2080mm

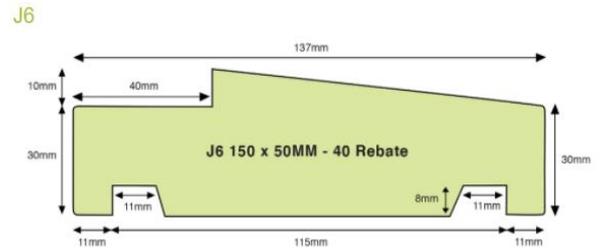

	<b>Height</b>	<b>Width</b>
<b>Single hung door</b>	door plus 70mm	door plus 80mm
<b>Pair/double hung door</b>	door plus 70mm	door x2 plus 80mm
<b>Cavity slider</b>	door plus 100mm	door X2 plus 40mm
<b>Pair/double cavity slider</b>	door plus 100mm	door X4 plus 20mm
<b>Robemaker pair of sliders</b>	door plus 80mm	door X2 plus 50mm
<b>Robemaker three door slider</b>	door plus 80mm	door X3 plus 20mm
<b>4 door bifold Cowdroy gear</b>	door plus 100mm	door X4 plus 100mm
<b>2 door bifold Cowdroy gear</b>	door plus 100mm	door X2 plus 100mm
<b>Lift door (minimum 860 wide door)</b>	door plus 70mm	door plus 120mm

Standard door widths are 410,460,510,560,610,660,710,760,810 mm wide

Standard over widths are 860,910 mm wide

Over width doors with steel inserts are 960,1000,1050,1100,1150,1200 mm wide

Standard door height is 1980mm high, next size up is 2200mm high and then next size up is 2400mm high.